



## KEY APPLICATIONS





### Electrical

- Electrical panels and wiring
- Fuses and insulators
- Switch gear

### Industrial maintenance

- Motors, pumps, bearings and windings
- Belt and drive shafts
- Steam traps



### HVAC/R

- Ducts, grills and diffusers
- Heating and cooling systems
- Bearing components
- Pipes

### Automotive

- Brakes
- Condensers
- Wiring, bearings, exhaust systems and manifolds
- Hydraulics, compressors and seals

## 2 EXCITING MODELS

	VT02	VT04
Built in digital camera	Yes	
Thermal heat map overlay	Yes (five blending modes)	
Image optics system	PyroBlend™ optic	PyroBlend™ Plus optic, 4 x sharper image
Center point temperature measurement	Yes	
Field of view	20° x 20°	28° x 28°
Battery	4 AA batteries (8 hours)	Li-Ion rechargeable battery (8 hours)
Automated monitoring with temperature alarms	-	Yes
Temperature range	-10 °C to +250 °C (14 °F to 482 °F)	
Temperature measurement accuracy	±2 °C or ±2 %	
Compact and focus free	Yes – no training required	
SD card (four Gb included)	Yes – 10,000 images per Gb	
Professional reporting SmartView® software	Included	

#### Fluke Europe B.V.

P.O. Box 1186  
5602 BD Eindhoven  
The Netherlands  
Web: [www.fluke.co.uk](http://www.fluke.co.uk)

#### For more information call:

In Europe/M-East/Africa  
+31 (0) 40 2 675 200 or  
Fax +31 (0) 40 2 675 222

#### Fluke (UK) Ltd.

52 Hurricane Way  
Norwich, Norfolk  
NR6 6JB  
United Kingdom  
Tel.: +44 (0) 20 7942 0700  
Fax: +44 (0) 20 7942 0701  
E-mail: [industrial@uk.fluke.nl](mailto:industrial@uk.fluke.nl)  
Web: [www.fluke.co.uk](http://www.fluke.co.uk)

©2013 Fluke Corporation. All rights reserved.  
Data subject to alteration without notice.  
07/2013 Pub\_ID: 12086-eng

Modification of this document is not permitted without written permission from Fluke Corporation.

## Fluke Visual IR Thermometers

# DESIGNED TO SEE IT ALL



Fluke VT02  
Visual IR  
Thermometer

Fluke VT04  
Visual IR  
Thermometer

A troubleshooting tool  
with a thermal heat map

# SEARCHING FOR TEMPERATURE ISSUES SPOT BY SPOT?

Traditional IR thermometers are low cost but designed for only one purpose — detecting single-spot temperature readings.

If you don't know exactly where to look, you can miss a serious problem or waste valuable time searching.




# HOT AND COLD SPOTS CAN'T HIDE ANYMORE.

Visual IR thermometers combine the convenience of a point and shoot IR thermometer with the visual insight of an infrared camera.

Do more in less time. For instance, scan an entire electrical panel in seconds and have the confidence you didn't miss anything.

# DESIGNED TO SEE IT ALL

Every Fluke Visual IR Thermometer has a built-in digital camera with a thermal heat map overlay to instantly identify the exact location of the problem.

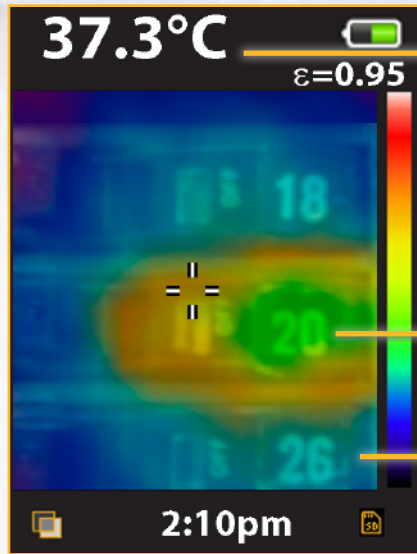


**Centerpoint temperature (° C / ° F)**


**Digital image for context**

Clearly see that breaker 20 is overloaded and communicate your findings.


**Thermal heat map overlay**



25 % heat map



50 % heat map



75 % heat map

# SEE THE DIFFERENCE

See how a traditional IR thermometer and an entry level infrared camera make it challenging to communicate the issue on breaker 20.




**Visual inspection**

No issues are obvious to the naked eye.




**Traditional IR thermometer**

Optimized for single point measurements.



**Entry level infrared camera**

Challenging to see the exact location.



**Visual IR Thermometer**

Digital image with heat map overlay detects the exact location of the issue.