



Specification For Approval

Part NO. : WFX-20050829-68

Ver: A 0


Product Code : 53-37-0212

Page : 1 / 1

1.CONSTRUCTION

Item		A.Q.L	Description
Conductor	NO./mm	0.18	Stranded bare copper
	2 / 0.18 x 12	(+/-0.008)	
Insulation	NO./mm	1.60	Red,White
	2 / 1.60	(+/-0.13)	PVC insulation
Filling	NO./mm		
	cotton thread		Cotton thread filling
Shield	NO./mm	0.12 (+/-0.008)	Cotton paper spiral shield
	Cotton paper+T0.12*80	80 (+/-2)	Tinned copper braid shield
Jacket	NO./mm	5.0	Black
	5.0	(+/-0.50)	PVC jacket

2.DESIGN

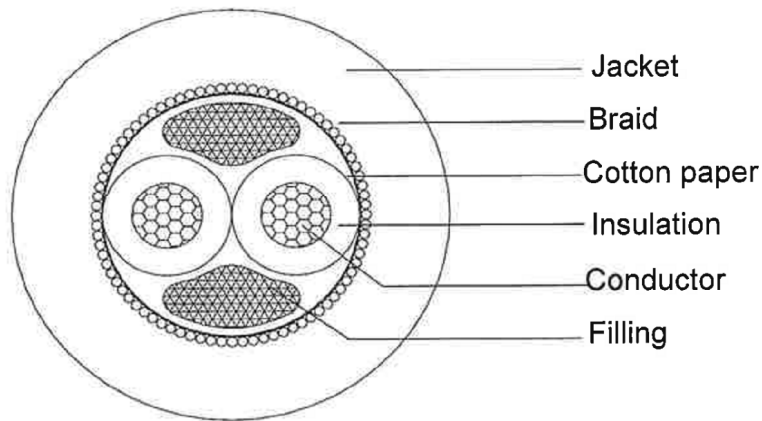

3.CHARACTERISTICS

Item	Description	Standards
1. Cond. Res.	20°C, Conductor DC Resistance	< 7.34 Ω/100M
2. Insul. Res.	20°C, Insulation Resistance	> 500 M Ω .M
3. Rated Tem.	-----	70°C
4. Rated Voltage	-----	30 V

Remark: Please contact us if you have more requirements or specifications subject to change, or else in accordance with the standards.

Prepared: Liu

Approved by :

Client Approved:

Date: 2005-8-30